



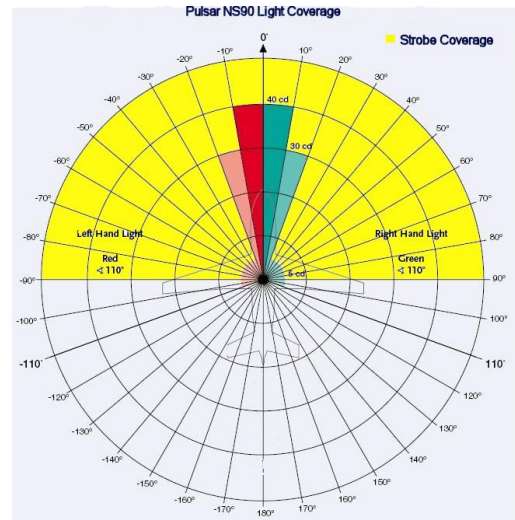

Product Datasheet Pulsar NS90 Nav/Strobe Light

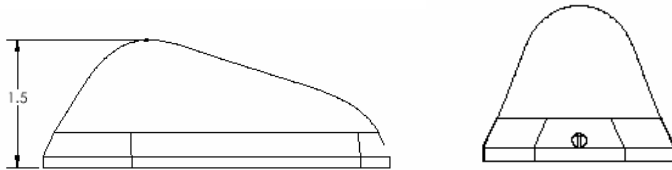

Voltage Range: 9-36VDC
 Current Draw at 12VDC: 0.8 Amp Avg / 2.25 Amps Peak
 Power Consumption: 10 Watts Avg
 Strobe Power Supply: Built In
 Strobe Synchronization: Built In
 Thermal Protection: Built In
 Nav Light: TSO C30c Compliant
 Strobe: TSO C96a Class 2 Compliant (forward arc)
 LED Count: 13

Length: 4"
 Width: 1.85"
 Depth: 1.5"
 Weight: 4 Oz
 Heat Sink Material: Clear Anodized Aluminum
 Lens Material: Polycarbonate
 Screw Mount: 3x 6-32 Machine Screws
 Rated Life: 50,000 Hours
 Temperature Range: -55C to +70C

